

## CUTE B&H UP 4K

( With remote control function)

### Operating Manual





Read this instruction carefully before using

### Product Overview

The equipment is a high-quality audio/video internet telephone system, which consists of multi-array microphone pickup and UHD camera and has the function of manual and automatic screen adjustment, echo cancellation and noise reduction. Featured by installation of various application scenarios, flexible adjustment of camera angle and easy operation of remote control, the equipment can be used in daily video conference of enterprise, remote education, live broadcast and telemedicine.

### Introduction to main machine

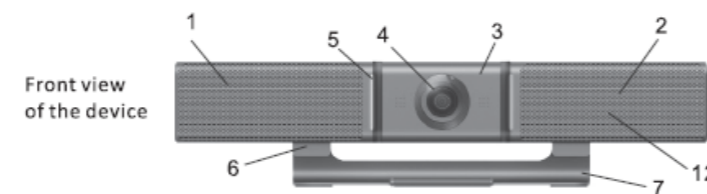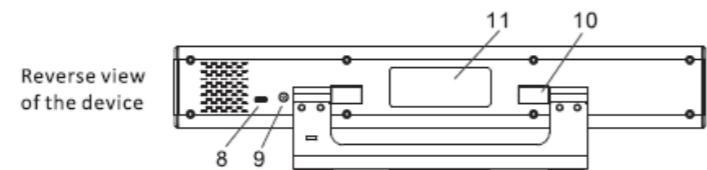


- |                                   |                                 |
|-----------------------------------|---------------------------------|
| (1) Loudspeaker                   | (7) Rotatable support frame     |
| (2) Multi-array microphone        | (8) Type-C interface            |
| (3) Multi-angle adjustable camera | (9) DC power input socket       |
| (4) Pick-up lens                  | (10) Support frame shaft        |
| (5) Status indicator              | (11) Equipment nameplate        |
| (6) Front registration mast       | (12) Built-in infrared receiver |

#### Description of status light

- Power on to make a call, and the blue light is normally on.
- If the microphone is mute, the red light is normally on.
- If the loudspeaker is mute, the blue light flickers slowly.
- If both the microphone and the loudspeaker are mute, the red light and the blue light flicker alternately.

P.1

### Introduction to remote control and key

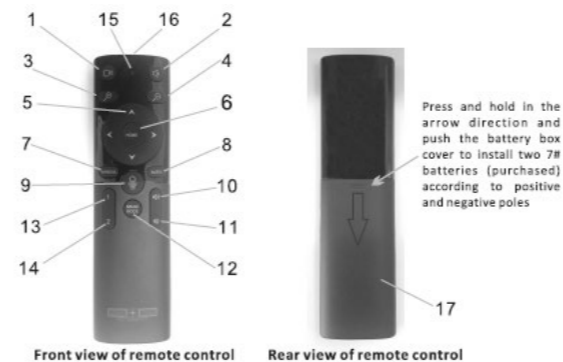


- Camera lens ON/OFF.
- Mute loudspeaker.
- Image magnification.
- Image reduction.
- View UDLR movement (in the maximum view).
- Default maximum view reset.
- Manual adjustment mode of image.
- Automatic adjustment mode of image and intelligent adjustment of view and image.
- Mute microphone.
- Loudspeaker volume +.
- Loudspeaker volume -.
- Mirror image switch.
- Preset position 1 of view, Long Press and hold this key to store; short press it to view.
- Preset position 2 of view, Long Press and hold this key to store; short press it to view.
- Key indicator.
- Infrared launch window points at the AIO when controlled remotely.
- The remote control can be used after two 7#(AAA) batteries are installed in the battery box.

Note: Manual adjustment key is invalid under automatic adjustment mode.


P.2

### Packing list

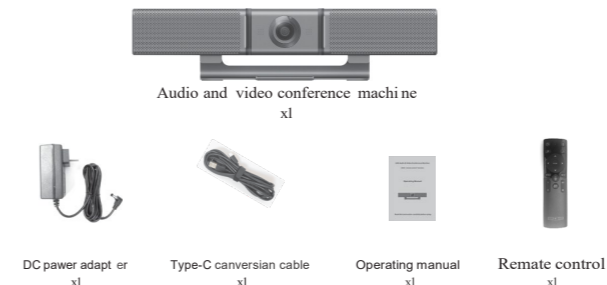


### Equipment installation

The machine can be installed according to the application scenario which is usually installed below or at the top of the display screen. It is recommended that the installation height is in the visible range and roughly at the same horizontal plane of the human eye.

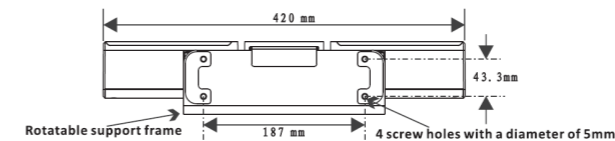

The size of the screw hole at the bottom of the support frame

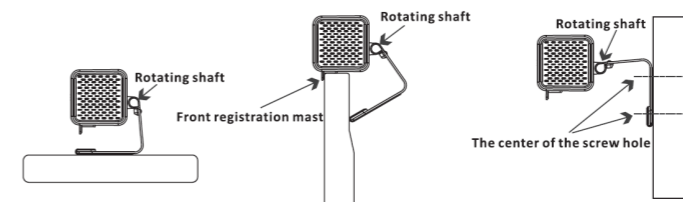

Installation method I:  
The device is placed on a horizontal support

Installation method II:  
The device is placed at the top of the display

Installation method III:  
The device is screwed to the vertical plane

P.3

### Operating instructions

- Open the product packaging, take out the device and accessories, and check the number of packing lists.
- The device can be installed according to the application scenario of the audio and video network phone, fixed and placed.
- First, insert the plug of the DC power adapter into the DC power socket of the device, and then insert the power adapter into the socket of the AC power supply. At this time, the indicator light of the device lights up; Second, insert the Type-C plug of the Type-C conversion cable into the corresponding socket of the device, and insert the USB plug of the USB socket of the computer equipment.
- When the device and the computer are connected, the device driver will be installed automatically. After the installation is successful, the computer screen will prompt that the device is ready or the device can be used.
- After the audio and video device drivers of the device are successfully installed, the application software of the instant messenger or audio and video network telephone (such as SKYPE) in the computer can be used. According to the operation method, long-range communication and interaction with network audio and video telephone can be conducted. Besides, the AIO can be operated using remote control.

**Note:** The device is suitable for computer devices with the operation system of Windows7/8/10, etc.

### Precautions

- Multiple microphone & speaker devices including this one cannot be connected at the same time on a computer device.
- It is required to connect the data cable of the USB interface directly to the computer device. If it is connected through a USB hub, some operational problems may be caused.
- To check if the audio and video device driver of the device is connected successfully, open the hardware option of "Computer Properties" on the computer, click "Device Manager" and then click "Sound Video and Game Controller" to check whether there is a device model of the native audio device; Select "Image Device" to see if there has a device model of the native camera. For further review, check whether the "Native Device Model" is showed on the default device in the option of Playback(Output) and Record (Input) in the Sound and Audio Device Properties of the Computer Control Panel Options. Otherwise, re-select the native device model and confirm it.
- In the using process, the volume can be adjusted through the speaker option on the computer if necessary. When using the application software of the instant messenger or audio and video network telephone, please select this one as the preferred audio and video device.
- Please do not attempt to repair the device, or there is a risk of electric shock. If there is a problem that needs to repair, please contact with Laiatech (support@laiatech.com).

P.4