



Laia t-Pod Quad 22

The Laia t-Pod Quad 22 is an audio controller for network video conferencing based on internet communication. With 4 omnidirectional microphones wirelessly cascaded in 2.4G, it can be connected to an array of loudspeakers. The pickup range of just one of its omnidirectional microphones can reach up to 2 meters, allowing you to conduct natural and fluent bidirectional meetings at the same time, offering users a high quality meeting experience.

Also compatible with wireless handheld microphone, typically used for large conferences or any other type of events or entertainment venues.

- Intelligent audio processing
- Support external active speakers
- Wireless charging
- Removable wireless omnidirectional microphone
- Support handheld microphone Wireless charging



2.4G WIRELESS CASCADED OMNIDIRECTIONAL MICROPHONE FOR LARGE ROOMS

PROFESSIONAL WARRANTY
3 year "Prime support" warranty 24 hrs advanced replacement

AUDIO CHARACTERISTICS

- Digital audio processing
- 384ms echo cancellation technology
- Intelligent dynamic noise reduction
- Full duplex
- 360° pickup range
- The effective pickup radius is 2 meters (Single omnidirectional microphone)

INTERFACE

- B type USB interface
- 6.5mm audio jack
- 6.5mm handheld microphone interface
- Handheld microphone receiver charging port
- Hand-held microphone volume adjustment knob
- Antenna interface
- DC power interface

WIRELESS OMNIDIRECTIONAL MICROPHONE

- Audio bandwidth is 100-16KHz
- Sensitivity: -38 dB 94dB SPL@1KHz
- Signal to noise ratio: 65dB 94dB SPL@1KHz, A-weight

COMPUTER SYSTEM REQUIRED

- Windows 7 / Windows 10 / MacOS

BUTTON ON MICS

- Microphone mute button
- Speaker mute button
- Volume up button
- Volume down button
- Slave switch button

PRODUCT PERFORMANCE STANDARDS

- YD/T 993-1998
- GB/T 9254-2008
- GB 4843.1-2011

MASTER LED LIGHT STATUS

- Master red light is always on: under normal work
- The speaker status indicator on master is on in green: Under normal work
- The speaker status indicator light on master is on in red: Speaker mute

SLAVE MICS LED LIGHT STATUS

- Normal work: the green light is always on
- Mute microphone: red light is always on
- Low power: the red light of the speaker flashes
- Volume adjustment: the mic green indicator flashes
- Not connected normally: the green light flashes

POWER SUPPLY


- Host power adapter -12V2A
- Slave power adapter -5V/500mA -Support wireless charging

ENVIRONMENTAL REQUIREMENTS

- Temperature: 5°-44° Humidity: 20-85% (no condensation)
- Noise level: <48db
- Storage temperature: -10°-55°

OTHERS

- Master size: 267*145*51mm
- Single mic size: 110*110*25mm
- Master weight: 1044g
- Single mic weight: 236g

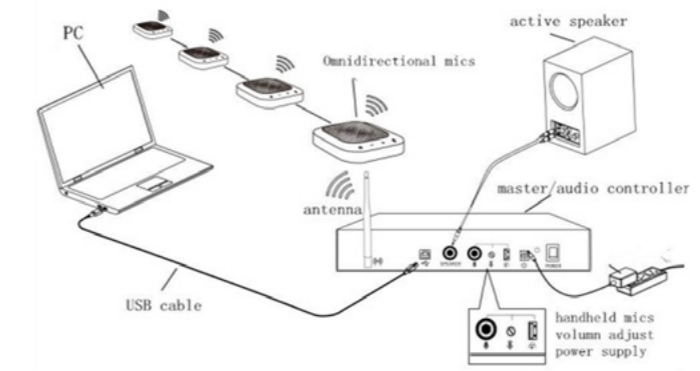

Headquarters:
Po. Europa, 26 Pta. 1 Of.3
S.S. de los Reyes 28703
Madrid- Spain

After-sale service:
C/Brújula, 4 Pol. Ind. PISA
41927 Mairena del Aljarafe
Sevilla - Spain

