


Laia B&H Lite


1 Appearance

This device is a brand new model integrating an omni-directional microphone and a wide-angle video camera. Operable without a drive, readily portable and easy to use, it is suitable for small meetings. It removes all constraints and enables real-time communication anytime anywhere.

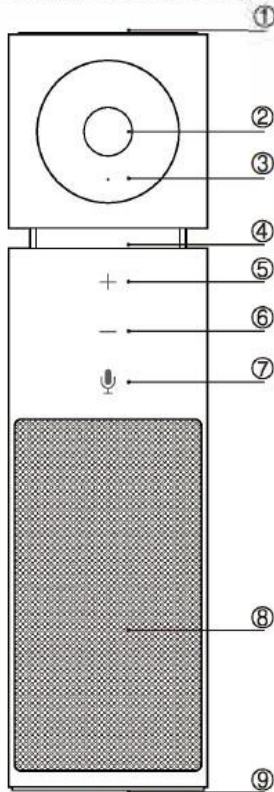


- ① Omni-directional Microphone
- ② Hd Wide-angle Lens
- ③ Lens Indicator Light
- ④ Microphone and Volume Indicator Light
- ⑤ Volume Up
- ⑥ Volume Down
- ⑦ Microphone ON/OFF
- ⑧ Loudspeaker
- ⑨ USB Port

2 Connection diagram

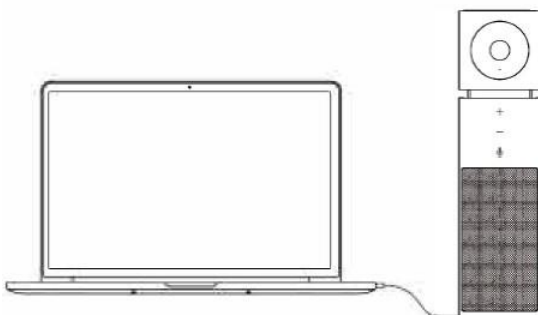

• Touch button function description

- + ——— Volume increase touch button
- - - - - Volume decrease touch button
-  ——— Close or open the microphone touch buttons

3 Lamp State instructions

Green light on: the microphone and speaker is working

Red light on: the microphone is mute, the speaker is working

Green light flash: the volume '+' '-' touch button is operating


Green light slow flash: the microphone is working, the speaker is mute

Red and green light slow flash alternately: the microphone is mute, the speaker is mute


Lens lights on: camera is working

4 DIP Switch

The "SW-1" and "SW-2" two DIP switch are set to OFF state, that is, select normal working mode.

DIP Switch	No.	SW-1	SW-2	Explain
	1	OFF	OFF	Normal Mode
	2	ON	OFF	Upgrade Mode
	3	OFF	ON	Debug Mode
	4	ON	ON	--

5 RS232 Interface

Interface diagram	No.	Function	No.	Function
	1	DTR	5	RXD
	2	DSR	6	GND
	3	TXD	7	IR OUT
	4	GND	8	NC

6 Safety Precautions

Electrical safety

The installation and use of this product must strictly comply with local electrical safety standards.

Power polarity

This product uses DC+12V power, please pay attention to the power polarity.



Careful installation

Do not grab the camera head to move the camera.

Do not rotate head of camera by hand, it may cause mechanical problems.

Do not unauthorized disassemble

This product has no parts which can be repaired by the user. The damage caused by the user's own disassembly is not covered by warranty.



- Electromagnetic fields at specific frequencies may affect the image of the machine.
- Do not hot-plug the power supply during the use of the IP Camera.

- Warranty card does not match the product number or it is altered.

7 Troubleshooting

Image

- The monitor shows no image
 - 1) Check that the camera power supply is connected, the voltage is normal, and the power indicator light is always on.
 - 2) Turn off the power switch to check whether the camera is self-testing.
 - 3) Check the two DIP switch of the camera bottom are set to OFF state.
 - 4) Check the cable of video platform and TV whether correct connection.
- Sometimes without the image
Check the cable of video platform and TV whether correct connection.

- Image have jitter when the camera lens at max multiple.
 - 1) Check whether the camera installed position be stabled.
 - 2) Check whether have vibrating machinery or object near the camera.

Control

- Remote control can not control
 - 1) Check and replace the new battery for the remote controller.
 - 2) Check whether the camera working mode is correct.
- Series port can not control
 - 1) Check whether the camera protocol, address such is the same.
 - 2) Check whether the control line is connected well.

8 Toxic and Harmful Substances

Part Name	Toxic or harmful substances or elements					
	(Pb)	(Hg)	(Cd)	(CrVI)	(PBB)	(PBDE)
Metal	x	0	0	0	0	0
Plastic	0	0	0	0	0	0
Glass	x	0	0	0	0	0
Circuit board	x	0	0	0	0	0
Power	x	0	0	0	0	0
Attached	x	0	0	0	0	0

This form is compiled in accordance with SJ/T 11364.

O: Indicates that the content of the hazardous substance in all homogenized materials of the component is subject to the limit specified in GB/T 26572.

x: Said the hazardous substance in at least one of the components homogenized material content in excess of the GB/T 26572 limit requirements, and there are no mature alternatives.

9 Warranty Card

If failure caused by non-human causes occurs within one year from the date of purchase of the machine, you may enjoy the warranty service of the product. Any of the following circumstances is not covered by the warranty:

- Without disassemble, modification such as fault causes.
- Use of an environment does not conform to requirements of the product.
- Irresistible factors, such as fire, earthquake, lightning strike, etc.

User Name	
User Address/Post Code	
Contact Number	
Product Model	
Product Series	
Purchasing Date	
Invoice No.	
Sales Department	

User save, lost or not compensated

Sales Department: (seal)